


# Union Thresherman, Incorporated

P.O. Box 71  
Manawa, WI 54949

Website: [www.symcoutc.com](http://www.symcoutc.com)

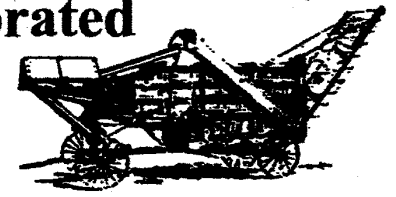

## Symco Union Thresherman's Antique Tractor Pulling Rules

Revised 04/08/2017

Classes: For Spring and Thresheree Classes visit our web site: [www.symcoutc.com](http://www.symcoutc.com)

\*Spring Pull Start at 10:00 AM Weigh-In 7:00-9:30 AM\*\*Thresheree Pull Start at 11:00 AM Weigh-In 7:00-10:00 AM\*

Pure Stock Antique I – 1938 or older

Improved – 1957 or older

Pure Stock Antique II – 1939 – 1957

Classic – 1960 or older

Modified - 1957 or older

**One Pull Allowed per Tractor in Each Class**

## **WE USE THE NEBRASKA TRACTOR TEST RESULTS**

### General Rules

1. Judges have the right to inspect under hoods and curtains, anyone that does not comply, he/she will be disqualified
2. Any puller must operate tractor in a safe manner on and off the track at all times (MUST SUPPLY YOUR OWN CLEVIS)
3. Anyone tampering with another tractor will be disqualified
4. Driver must remain on seat with one hand on steering wheel, no jumping or bouncing, but leaning will be allowed
5. No crawlers, tire chains or duals
6. Steel Wheels will pull last in class and one set of extension rims allowed
7. Rigid draw bar must not exceed 20 inches in height or be closer than 18 inches to center of axle (except pure stock)
8. Tractors must stop if flagged
9. Heavier tractors (88, 44, G, M, U Moline's) can not pull under 5000
10. Tractors without wheelie bars will follow the track judge's rules for height and must be kept under control. If not you will be stopped and measurement will be taken at that point
11. Any tractor violating track boundaries or anything falls off tractor before pin is pulled you will be disqualified
12. Any driver 12 to 17 years old must have parent's signature and Tractor Safety Class NO EXCEPTIONS
13. Engine will be controlled by throttle lever with positive stop only. No vise grips, strings, wires or foot feet allowed
14. No using torque amplifiers, or shifts on the go
15. Add on weights not exceed 24" ahead of the front castings, or 24" behind center of rear axle, or beyond original platform. Weights must not interfere with hooking the tractor (pure stock tractors wheel weights only see pure stock rules on weights)
16. No all-thread (ready rod) to extend 2" past outer most wheel weight
17. **ONE PULL PER TRACTOR! (Thresheree Only)**
18. Any disqualifications, there will be no refunds
19. **TRACK JUDGES RULING IS FINAL ON ALL AREAS OF DISPUTE NOT COVERED IN THESE RULES! Any belligerent behavior will result in IMMEDIATE DISQUALIFICATION.**
20. **All tires must have original molded size on tire casing.**

### PURE STOCK

1. Engine: stock block, head, manifold, carb, no add on parts not in original parts book, no electric ignitions, (under cap Petronix ok) stock coil only, stock hp and rpms. **Tractors may be put on Dyno and must have working PTO.**
2. Check Tire Chart for tire sizes – Tire Size must be on tire
3. Original hitches and drawbars, pulling eyes are allowed (no clevis with spacers, or bent-up drawbars) Hook point must be 13" -14" from end of PTO, or no closer than 30" from center of axle, allowances will be made on certain models
4. Tractors must have stock appearance

